




LIGHTBAR SPECIFICATION SHEET

PART No: 15836

DESCRIPTION :

SOLEX47MCCSPEAKER-C121834

Cable : Quick Disconnect with 22' Cable
 Mounting Kit : Metal Mounting kit LX Kit

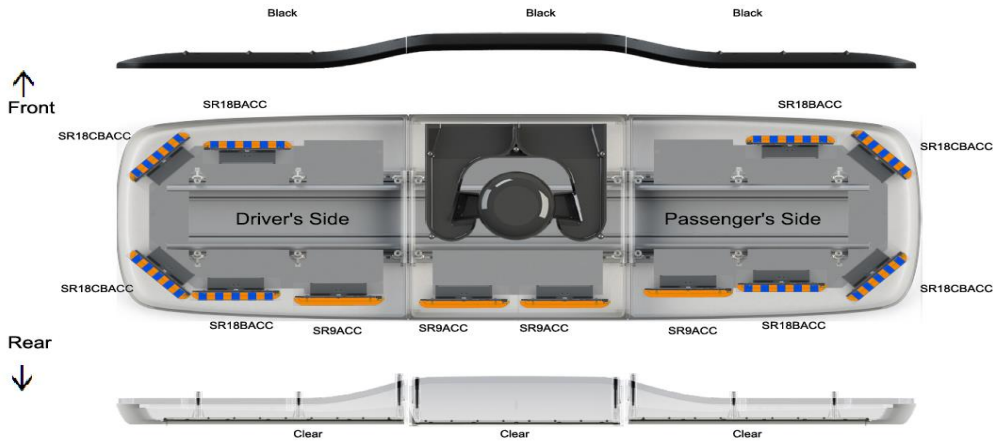

Wire Color	Function	Notes
GRN/BLK	Level 1 (R65)	
WHT/BLK	Level 2 (Blue only)	
BLU/BLK	SPEAKER -	
GRN/WHT	SPEAKER +	
WHT	Arrowstick Flash	
BLU/WHT	Alley Light Flash	
BLK	Takedown Flash	
BLK/WHT	SPEAKER +	
RED	Arrowstick Left	
RED/WHT	Alley Light Right	
RED/BLK	Level 3 (Full Amber)	
ORG/BLK	Takedown Lights Steady Burn	
BLK/RED	SPEAKER -	
GRN	Cruise Lights	
ORG	Arrowstick Right	
BLU	Lightbar DIM	
RED 1,5mm ³	Positive Lightbar	
RED 1,5mm ³	Positive Lightbar	
RED 1,5mm ³	Positive Lightbar	
BLACK 1,5mm ²	Ground	
BLACK 1,5mm ²	Ground	
BLACK 1,5mm ²	Ground	
BLACK 1,5mm ²	Ground	

Notes:

- L1 = Level 1 (R65)
- L2 = Level 2 (Blue only)
- L3 = Level 3 (Full amber cycle flash)
- all functions are positive inputs
- Dim function dims the complete lightbar