




LIGHTBAR SPECIFICATION SHEET

PART No: 15721

DESCRIPTION : 21TRPL44CC-C118709

Cable : Quick Disconnect with 22' Cable
 Mounting Kit : Metal Mounting kit LX Kit

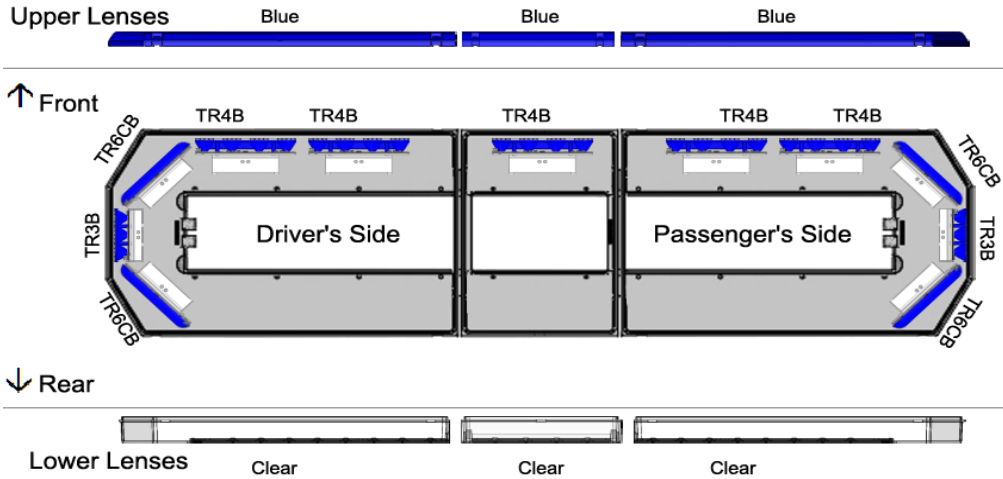

Wire Color	Function	Notes
GRN/BLK	Level 1 (R65)	Connection7 adapter RJ45/molex8 intav
WHT/BLK	Level 2 (Blue rear only)	Connection6 adapter RJ45/molex8 intav
BLU/BLK	Rear Cut-off	Connection5 adapter RJ45/molex8 intav
GRN/WHT	Front Cut-off	Connection4 adapter RJ45/molex8 intav
WHT	Arrowstick Flash	Connection3 adapter RJ45/molex8 intav
BLU/WHT	Alley Light Flash	Connection2 adapter RJ45/molex8 intav
BLK	Takedown Flash	
BLK/WHT	Alley Light Left	
RED	Arrowstick Left	
RED/WHT	Alley Light Right	
RED/BLK	Level 3 (Full Blue)	
ORG/BLK	Takedown Lights Steady Burn	
BLK/RED	Pattern Select	
GRN	Cruise Lights	
ORG	Arrowstick Right	
BLU	Lightbar DIM	
RED 1,5mm ³	Positive Lightbar	
RED 1,5mm ³	Positive Lightbar	
RED 1,5mm ³	Positive Lightbar	
BLACK 1,5mm ²	Ground	
BLACK 1,5mm ²	Ground	
BLACK 1,5mm ²	Ground	
BLACK 1,5mm ²	Ground	

Notes:

- L1 = Level 1 (R65)
- L2 = Level 2 (Blue rear only)
- L3 = Level 3 (Full blue cycle flash)
- all functions are positive inputs
- Dim function dims the complete lightbar