




LIGHTBAR SPECIFICATION SHEET

PART No: 15123
 DESCRIPTION : 21TRPL69-C67204

Cable : 15" cable length
 Mounting Kit : Metal Mounting kit LX Kit

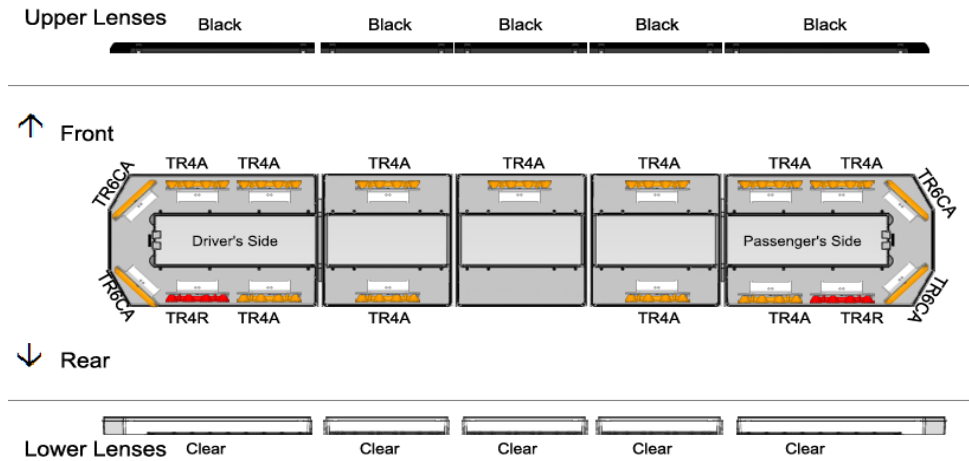

Wire Color	Function	Notes
GRN/BLK	Level 1 (R65)	
WHT/BLK	Level 2 (Blue rear only)	
RED/BLK	Level 3 (Full amber)	
ORG/BLK	Takedown Lights Steady Burn	
BLU/BLK	Rear Cut Off	
GRN/WHT	Front Cut Off	
RED/WHT	Right Alley Light	
BLK/WHT	Left Alley Light	
WHT	Arrowstick Flash	
BLK/RED	Pattern Select	
BLK	Takedown Flash	
RED	Arrowstick Left	
GRN	Cruise Lights	
ORG	Arrowstick Right	
BLU	Lightbar DIM	
BLU/WHT	Alley Light Flash	
RED 1,5mm ³	Positive Lightbar	
RED 1,5mm ³	Positive Lightbar	
RED 1,5mm ³	Positive Lightbar	
BLACK 1,5mm ²	Ground	
BLACK 1,5mm ²	Ground	
BLACK 1,5mm ²	Ground	
BLACK 1,5mm ²	Ground	

Notes:

- L1 = Level 1 (R65)
- L2 = Level 2 (Amber rear only)
- L3 = Level 3 (Full amber cycle flash)
- L1 + L2 = Front only
- L1 + L3 = Level Amber cycle flash + front white flash
- L2 + L3 = Level Amber cycle flash + rear red cycle flash
- L1 + L2 + L3 = Level Amber cycle flash + front white flash + rear red cycle flash
- all functions are positive inputs
- Dim function dims the complete lightbar