




LIGHTBAR SPECIFICATION SHEET

PART No: 15074
 DESCRIPTION :
21TRPL52MCF-C104380

Cable : Quick disconnect with 22' Cable
 Mounting Kit : Metal Mounting kit LX Kit

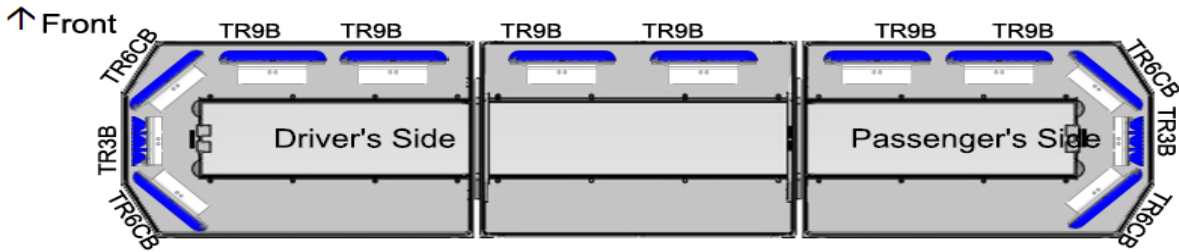

Wire Color	Function	Notes
GRN/BLK	Level 1 (R65)	
WHT/BLK	Level 2 (Blue rear only)	
RED/BLK	Level 3 (Full blue)	
ORG/BLK	Takedown Lights Steady Burn	
BLU/BLK	Turn signal Right	
GRN/WHT	Turn signal Left	
RED/WHT	Right Alley light	
BLK/WHT	Left Alley Light	
WHT	Arrowstick Flash	
BLK/RED	Pattern Select	
BLK	Takedown Flash	
RED	Arrowstick Left	
GRN	Stop Lights	
ORG	Arrowstick Right	
BLU	Lightbar DIM	
BLU/WHT	Alley Light Flash	
RED 1,5mm ³	Positive Lightbar	
RED 1,5mm ³	Positive Lightbar	
RED 1,5mm ³	Positive Lightbar	
BLACK 1,5mm ²	Ground	
BLACK 1,5mm ²	Ground	
BLACK 1,5mm ²	Ground	
BLACK 1,5mm ²	Ground	

- Code3 intelligent communication
- L1 = Level 1 (R65)
 - L3 = Level 3 (Full blue cycle flash)
 - L2 + L3 = Level Blue cycle flash + rear red cycle flash
 - all functions are positive inputs
 - Dim function dims the complete lightbar